



Cushion Tilt Deck


Model# CTT7216N14
83" Width X 2 + 16' Length)



- | | | |
|---|-----------------------------------|---------------------------------|
| (2) 7K 4" Drop E-Z Lube Elec. Axles | Heavy Duty Fenders & Backs | 2" Treated Lumber Floor |
| ST235-80R-16" LRE 10-PR Tires on 8-Hole Wheel | Break-A-Way Kit | Rubber Mtd Sealed LED Lights |
| 2 5/16" Adj. Coupler or Pintel Eye | H.D. Safety Chains | Sealed Wire Harness w/7-Way Plg |
| Dual Pin SL Dropleg Jack (12K) | (10) Weld-On D-Rings | Spare Tire Carrier |
| Cushion Cylinder w/Control Flow Valve | Recv'r. Tube for Mounting A Winch | Document Holder |
| 2-Component Epoxy & Poly Primer & Top Coat | Metal Lockable A-Frame Tool Box | 11° Tilt |

(Ship Wt.: 3,190# GAWR: 14,000# GVWR: 14,000#)

<u>MAINFRAME & TONGUE:</u>	5 X 3" Rec. Tubing	<u>CENTERS:</u>	12"
<u>CROSS MEMBERS:</u>	3" Channel	<u>DECK HEIGHT</u>	20" (Approx.)

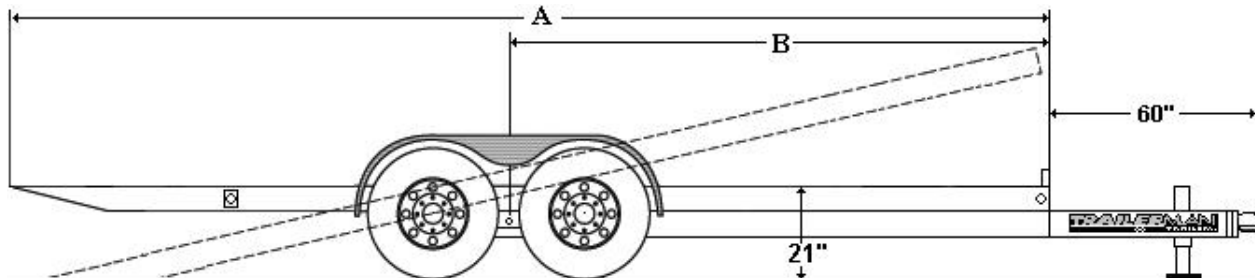

Measurements		
Length	A	B
2+16	220	122
4+16	244	146
6+16	268	170

All measurements are approximate

SOME AVAILABLE OPTIONS			
Drive Over Fenders	Surge Brakes	Gooseneck Option w/Winch Plate	Diamond Plate Steel Floor
Mesh Tray In Tongue	Fork Carriers	4' & 6' Stationary Deck	ST235-80R-16" Spare Mtd.



MANY OTHER OPTIONS ARE AVAILABLE –VISIT OUR WEBSITE TO FIND AN AUTHORIZED TRAILERMAN® DEALER: www.trailertrailer.net