

Model# CST7162S12

Contractor's Special

16'+2' (18') Length x 83" Width Between Fenders




(Shown w/ optional Fork Carriers)

- | | | |
|--|-----------------------------------|-------------------------------|
| (2) 6K 8-Hole EZ Lube Elec. Brake Axles w/ Break-a-way Kit | Dual Pin SL Dropleg Jack (12K) | Rubber Mtd Waterproof Lights |
| ST235-80R-16" 10-PR Tires on 8-Hole Wheel | Diamond Plate Fenders & Backs | 2" Treated Lumber Floor |
| (2) Spring Asstd Stand Up Ramps w/Knees | 2 5/16" Adj Coupler or Pintle Eye | Stake Pockets/Rub Rail |
| Sealed Wire Harness w/ 7-Way Light Plug | H D Safety Chains | 2' Steel Dove w/Traction Bars |

(Ship Wt.: 3,110# GAWR: 12,000# GVWR: 12,000#)

MAINFRAME & TONGUE: 6" Channel

CROSS MEMBERS: 3" Channel on 16" Centers

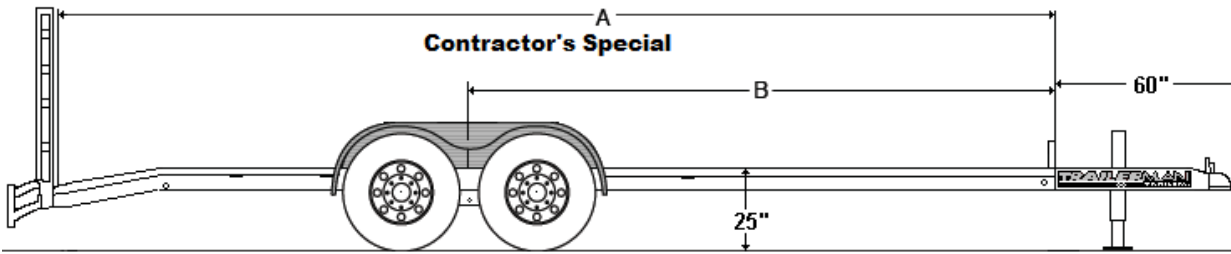

Measurements <i>when equipped with 2' dove tail</i>		
Length	A	B
16	192	125
18	216	136
20	240	151
22	264	166
24	288	181
25	300	189
26	312	196

All measurements are approximate

CONTRACTOR'S SPECIAL OPTIONS

Lengths from 14' - 26'	Gooseneck Option	Less Dove Tail	Mesh Tool Tray in Tongue
3rd 6K Axle w/Brakes-18K GVWR	Fork Carriers	Less Ramps	5' Slide in Ramps w/Rear Dropleg Stabilizers
7,000# EZ Lube Axle Pkg-14K GVWR	Surge Brakes	Mesh on Ramps	5' Tall HD 2 pc Mesh Gate w/Knees
3rd 7K Axle w/Brakes-21K GVWR	Spare Tire Mtd.	Removable Fender/s	L.E.D. Light Pkg. Upgrade
Receiver Tube for Mounting A Winch	Spare Tire Carrier	Weld on D-Rings	1/8" Diamond Plate Steel Floor
7,200# EZ Lube Axle Pkg. w/4K Spgs, 5/8" Studs, 12 1/4" x 2 1/2" Elec Brake & 14-ply 16" Rated Tires			



MANY OTHER OPTIONS ARE AVAILABLE –VISIT OUR WEBSITE TO FIND AN AUTHORIZED TRAILERMAN® DEALER:

www.trailertrailer.com

{TrailerMan Trailers, Inc. reserves the right to make changes to the standard features at any time without notification. }